

The MTN/VM330D is a compact, rechargeable, portable handheld Vibration Meter designed to conform to ISO10816-3 and operate with a constant current accelerometer providing an accurate vibration measurement. Features comprise of the ability to store and transfer to PC up to 100 time-stamped readings, including; RMS, peak, peak-peak, crest factor and bearing conditions all on an easy to read vibrant colour LCD display.

## MTN/VM330D



## Carrying case



## Features

- Rechargeable Lithium-ion battery with worldwide charger
- Switchable low pass filter
- User-selectable units
- High visibility colour LCD display.
- RMS, peak, peak-peak, crest factor readings in acceleration, velocity or displacement modes
- Bearing condition modes (acceleration and velocity)
- 100 memories can store vibration and time/date
- Memory data can be transferred to PC with USB cable (included)
- Industrial rubber case
- Adaptive amplifier for high accuracy
- AC output
- Audio output for listening to vibration directly
- Supplied with MTN/2200 probe sensor, others available.

## Specifications

### Measurement ranges

Acceleration	20g
Velocity	200mm/s
Displacement	2000 $\mu$ m
<i>Different ranges available</i>	

Modes	RMS
	Peak
	Peak-peak
	Crest factor
	Bearing acceleration
	Bearing velocity

### ISO10816-3


- 8 modes for machine classes I, II, III, IV, rigid/fixed foundations
- Visual indication of machine status:

<span style="color: red;">■</span>	Unacceptable
<span style="color: orange;">■</span>	Unsatisfactory
<span style="color: yellow;">■</span>	Satisfactory
<span style="color: green;">■</span>	Good


### Frequency range

Low pass filters	1kHz, 5kHz, 10kHz
Band-pass filter	1-10kHz

## Dimensions

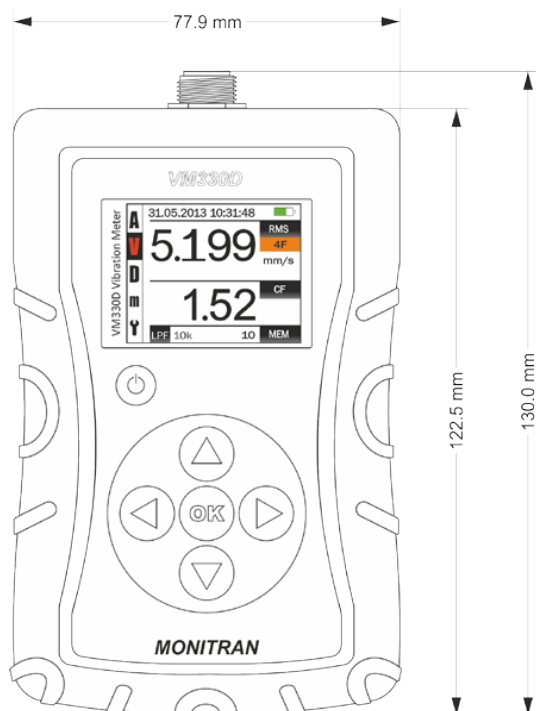

## VM330D colour display

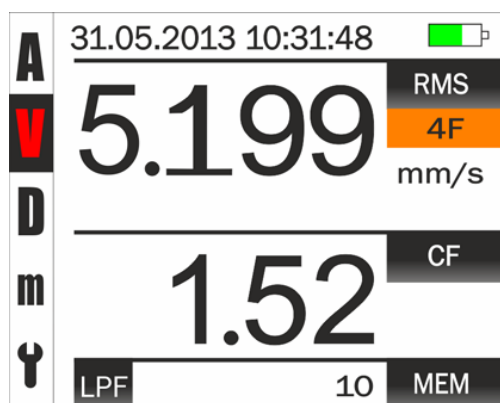

## Units

Acceleration	g, m/sec <sup>2</sup>
Velocity	mm/sec, in/sec
Displacement	µm, mils

## Display

Type	TFT 16bit colour
Resolution	160 x 128
Viewing angle	100°
Viewable size	35 x 28mm

## Memory

Size	100 slots storing vibration, time, date, filter, units, crest factor
PC data transfer	Vibration, time, date, filter, units, crest factor values to CSV file for use with spreadsheets

## Connections

Power/Data	USB mini-B
Headphones/AC signal	3.5mm stereo
Sensor	4 pin Lumberg

## Environmental

Operating temperature	0 to +45°C
Storage temperature	-20 to +60°C

## Power

Charger	100-240V/5V 1A USB with 4 adaptors
Battery	Li-ion 3.7V
Battery life	>18 hours
Power status	Battery icon indicates charging status, battery level

## Dimensions

Size (L x W x H)	130 x 78 x 28mm
------------------	-----------------

## Accessories

MTN/VM330D	Vibration meter
MTN/2100-X	Probe
MTN/MM001	Magnet
MTN/PS002	4" ¼"-28UNF Spike
MTN/CA476	Coiled sensor cable
MTN/CA477	USB A to mini USB B cable
MTN/BT004	Worldwide adaptor with 4 adaptors
MTN/HE016	Carry case
MTN/HB084	Handbook